




Thermon
South Africa (Pty) Ltd.

Accessories

for temperature sensors

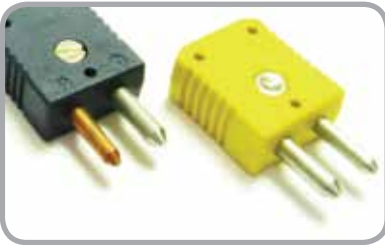

The sensor accessories in this section are selected due to their suitability for rugged environment, high temperature resistance and wide application in Industry.

	Stock Code	Description
	RSN-JCWM-YUM10J	"J" mini connector, male
	RSN-KCWM-YUM10K	"K" mini connector, male
	RSN-JCWF-YUF10J	"J" mini connector, female
	RSN-KCWF-YUF10K	"K" mini connector, female
	RSN-JPWF-YUF11J	"J" mini connector, panelmount, female
	RSN-KPWF-YUF11K	"K" mini connector, panelmount, female
	RSN-JPWF-YUF12J	"J" mini connector, panelmount (round), female

	Stock Code	Type
	RSN-JCWM-YUM30J	"J"
	RSN-KCWM-YUM30K	"K"
	RSN-TCWM-YUM30T	"T"
	RSN-RCWM-YUM30R	"R"
	RSN-SCWM-YUM30S	"S"

	Stock Code	Type
	RSN-JCWF-YUF30J	"J"
	RSN-KCWF-YUF30K	"K"
	RSN-TCWF-YUF30T	"T"
	RSN-RCWF-YUF30R	"R"
	RSN-SCWF-YUF30S	"S"

	Stock Code	Type
	RSN-JPWF-YUF31J	"J"
	RSN-KPWF-YUF31K	"K"
	RSN-TPWF-YUF31T	"T"
	RSN-RPWF-YUF31R	"R"
	RSN-SPWF-YUF31S	"S"

Stock Code & Description
RSN-PCSM-YUMD4-
Plug: RTD UMD4 Angled, typically used on Arburg machines
RSN-PCSM-YUMD4S
Plug: RTD UMD4 Straight


	Stock Code	Description
	RSN-ACWB-YUM10-	cable bracket for mini connector
	RSN-ACWB-YUM30-	cable bracket for standard connector



Sensor cables

Stock Code	Description
RSC-J2L-PPBAA24	"J" PVC-insulated cable (105°C max), 24AWG, stranded
RSC-J2L-TTBAA24	"J" PTFE-insulated cable (250°C max), 24AWG, stranded
RSC-J2LFGGSDA24	"J" Fibreglass-insulated, steel braided cable (350°C max), 24AWG, stranded
RSC-K2L-PPBAA24	"K" PVC-insulated cable (105°C max), 24AWG, stranded
RSC-K2L-TTBAA24	"K" PTFE-insulated cable (250°C max), 24AWG, stranded
RSC-K2LFGGSDA24	"K" Fibreglass-insulated, steel braided cable (350°C max), 24AWG, stranded
RSC-C3L-PPBDA24	"RTD" PVC-insulated cable (105°C max), 24AWG, stranded
RSC-C3L-TTUDA24	"RTD" PTFE-insulated cable, steel braided (250°C max), 24AWG, stranded
RSC-C3L-GGSDA24	"RTD" Fibreglass-insulated, steel braided cable (350°C max), 24AWG, stranded

Compression fittings

	Stock Code	Description
	RSK-PB1N4M-D047	1/4"NPT, D=4.76mm, Brass
	RSK-PB1N4M-D060	1/4"NPT, D=6.0mm, Brass
	RSK-PB1N2M-D047	1/2"NPT, D=4.76mm, Brass
	RSK-PB1N2M-D060	1/2"NPT, D=6.0mm, Brass
	RSK-PS1N4M-D047	1/4"NPT, D=4.76mm, stainless steel
	RSK-PS1N4M-D060	1/4"NPT, D=6.0mm, stainless steel
	RSK-PS1N2M-D047	1/2"NPT, D=4.76mm, stainless steel
	RSK-PS1N2M-D060	1/2"NPT, D=6.0mm, stainless steel

Thermon: Accessories for Temperature Sensors



Tel: +27 11 966 9800 (JHB)
+27 21 762 8995 (CT)
sales@thermon.co.za
www.unitemp.com/contact